

SFD-FB 6038

● **General Specifications**

- ⊙ Material ----- Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
- ⊙ Lead Wire ----- + Red - Black (Sensor) Yellow (Control) Brown
- ⊙ Life time -----25000 Hours Sleeve bearing
50000 Hours Ball bearing
- ⊙ Storage Temperatur--- -30℃ ~ +70℃ (Non-condensing)
- ⊙ Bearing Type----- Ball Bearings Sleeve
- ⊙ Speed Range----- ±10%
- ⊙ Part Numbering System

SFD-FB0612ME- **B R 1**

Waterproof level:0=no,1=IP55,2=IP68

Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor


Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing,L=long life bearing



60 X 60 X 38 mm (Mass: 90g)

Model No.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.Static Pressure		Noise
	VDC	VDC	AMP	Watt	R.P.M	M3/min	CFM	MmH2O	IN H2O	dB-A
SFD-FB0612LE	12	7.5~13.2	0.18	2.16	5500	0.816	28.81	7.76	0.306	38
SFD-FB0612ME			0.40	4.8	6500	0.972	34.34	11.23	0.442	43
SFD-FB0612HE			0.55	6.6	7500	1.139	40.22	15.18	0.598	48
SFD-FB0612HHE			0.82	9.84	8500	1.307	46.17	20.14	0.793	52
SFD-FB0612VHE			1.05	12.6	9500	1.481	52.30	25.71	1.012	54.5
SFD-FB0612SHE			1.25	15	11500	1.651	58.32	32.50	1.280	57.5
SFD-FB0612EHE			1.60	19.2	12500	1.796	63.44	37.55	1.478	61
SFD-FB0624LE	24	14.5~27.5	0.16	3.84	5500	0.816	28.81	7.76	0.306	38
SFD-FB0624ME			0.25	6	6500	0.972	34.34	11.23	0.442	43
SFD-FB0624HE			0.32	7.68	7500	1.139	40.22	15.18	0.598	48
SFD-FB0624HHE			0.48	11.52	8500	1.307	46.17	20.14	0.793	52

● **Dimensions(unit:mm/inch)**

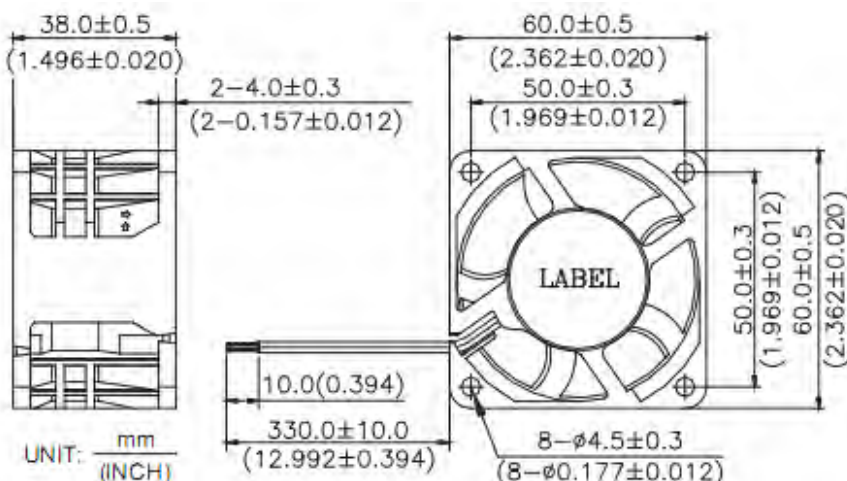

● **Air Flow-Static Pressure Characteristics**

